



IP20 DOTLESS 24V 14.4W/M 1315LM/M 320LED/M CCT TRI-COLOUR

SKU: VL-F320DOBV14-24CCT

- Beam angle 180°
- The matching controller can adjust the light and color.
- SMD process, High Reliability.




TECHNICAL DETAILS


Product No.	VL-F320DOBV14-24CCT
Power	14.4W/m
Voltage	DC24V
CRI	90+
Led Qty	320LEDs/M
Length/Reel	Available Up To 30 Metres
Working Temperature	-20~50°C
Storage Temperature	-30~80°C
Voltage Range	23 ~25V dc
Reverse Voltage	25V dc

Light Distribution

LUMINOUS INTENSITY
DISTRIBUTION DIAGRAM



CO PLANE ISOLUX
DIAGRAM (UNIT:lx)

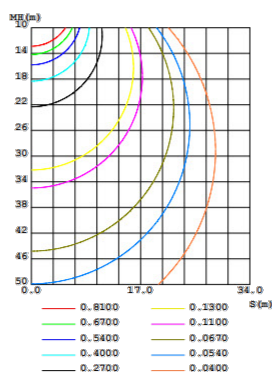


LUMENS PER METER


Color Temperature

2700K	640lm 195lm/ft
6500K	675lm 206lm/ft
Total Lumen Output: 1315lm/m	

DIMENSION

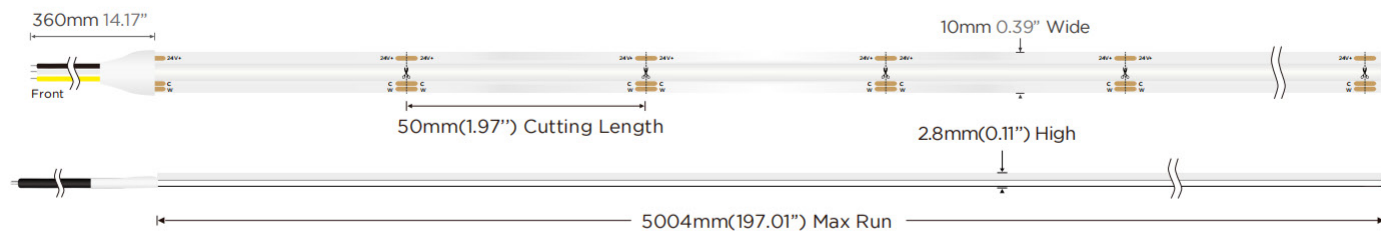


POWER CONNECTION DIAGRAM

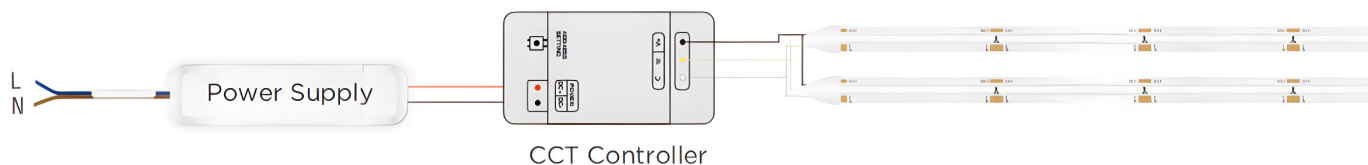

INSTALL

IP20

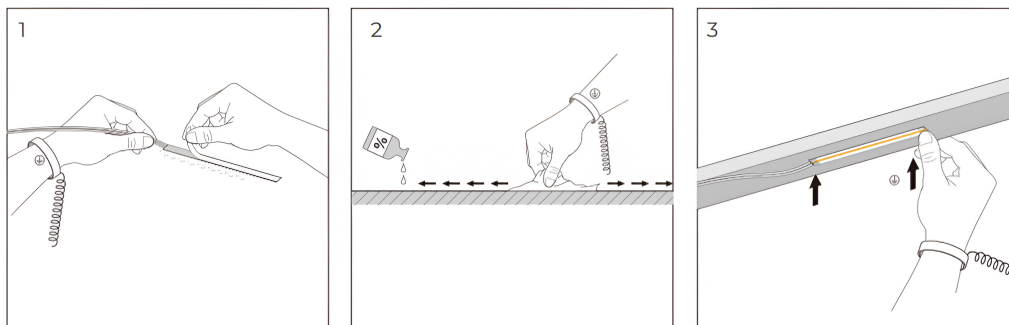

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

APPLICAITON NOTE

